

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS THE PROPERTY OF THE CUSTOMER, THE RESPONSIBILITY OF THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.

MOTOR SPECIFICATION

808536MTB-A11

Q.R. No.	Y001045	CUSTOMER NO.	
CUSTOMER	VARIOUS		
VOLTS	415	Hz	50
PHASE	3	PH	3
DUTY	A.O.M.		
R.P.M.	900	INSULATION CLASS	B130
NOM. OUTPUT	250 WATTS		
ROTATION	CLOCKWISE DRIVE END (REVERSIBLE)		
CAPACITOR	START	µF/V	RUN
ENCLOSURE	TOTALLY ENCLOSED		
MOTOR TYPE	3 PH	INSULATION CLASS	B130
THERMAL PROTECTION	NIL		
APPLICATION	FAN		
BEARING D.E.	6202 DDU C3 EA2	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 DDU C3 EA2		
SUPPLY LEAD	IN TERM. BOX		
EARTH PROVISION			
BASIC BUILD SPECIFICATION	305-570-05	PAINT/ COLOUR	PC GREY CASE PLAIN E/SH
PERFORMANCE SPECIFICATION	SP85105-01	RATING LABEL	LABEL STD. FMT
CONNECTION DIAGRAM	393-000-AM		

FASCO

DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS


C N693

MODEL 808536MTB-A11

VOLTS	415	TYPE	3 PHASE	Hz	50
WATTS	250	DUTY	AOM	PH	3
AMPS	0.95	CLASS	B130	PROT.	NIL
R.P.M.	900	UF/V	S	R	NIL
WATTS IN MAX		MAX KPA			

SPECIAL REQUIREMENTS:

- 1) WEATHER PROOF SPEC. BEI 176.
- 2) CONNECTION LABEL 393-487-01 TO BE PUT ON CASE.

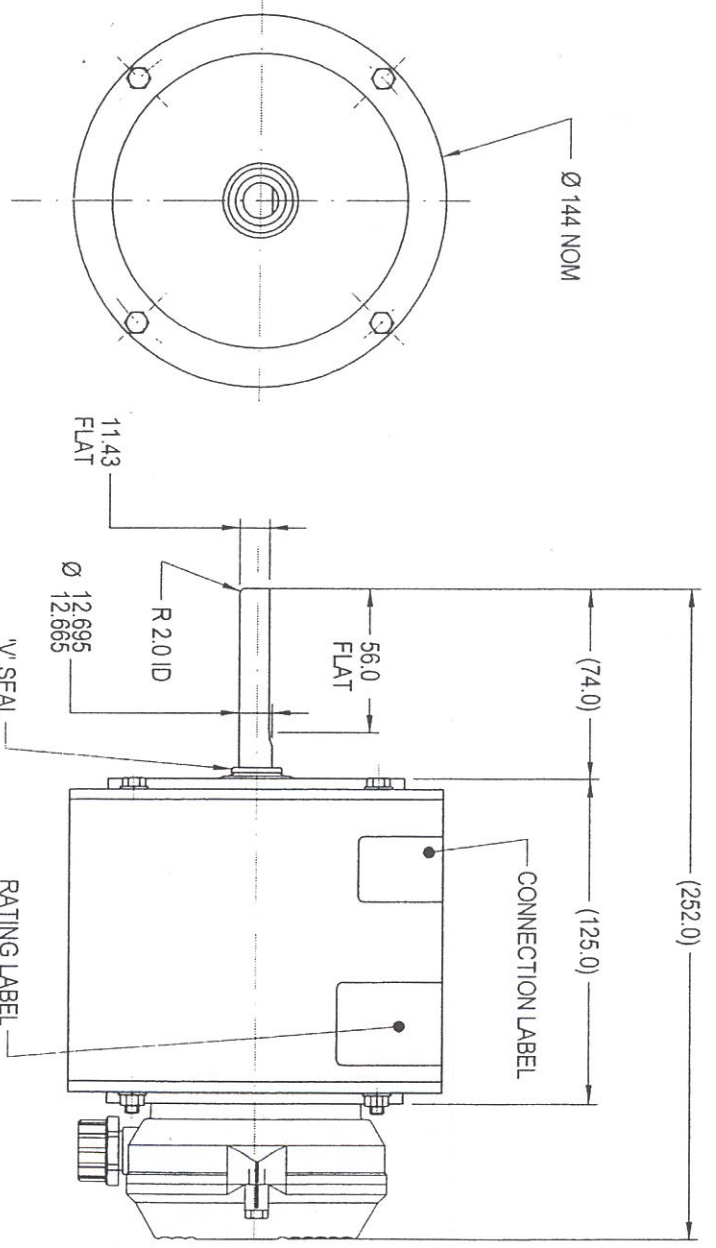

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM.

DECIMALS	TOLERANCES	ANGULAR
X ± 1.0		± 30'
XX ± 0.5		

THIS DRAWING BEARING THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

BCB SALES & SERVICE

PH : 03 9546 3833
FAX : 03 9546 3356

DANGUNPONG, NUTAPONG NUTAPONG
KONTIAPUR 11000 THAILAND

CONTROL PANEL

REV. 001

MOTOR

105:8536T-250-XCH

DWG. NO. 808536MTB-A11

Replaces 65924-80