

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT RESPONSIBLE FOR THE APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.

MOTOR SPECIFICATION

808557NVB-B11

Q.R. No.	Y001089	CUSTOMER NO.	
CUSTOMER	LOVELOCK LUKE		
VOLTS	240	Hz	50
Ph	1	Duty	A.O.M.
AMP	900		3.0
NOM. OUTPUT	450 WATTS		
ROTATION	CLOCK WISE AT SHAFT END		
CAPACITOR START	J/F/V	RUN	20/440
J/F/V	VENTED		
MOTOR TYPE	CSR	INSULATION CLASS	B
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN		
BEARING D.E.	6204 ZZ	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 ZZ		
SUPPLY LEAD	SINGLE CORE 2300±30 BRAIDED SLEEVING		
EARTH PROVISION	VIA SUPPLY LEAD		
BASIC BUILD SPECIFICATION	305-697-01	PANTRY COLOUR	GREY
PERFORMANCE SPECIFICATION	SP85188-01		SEE NOTE (2)
CONNECTION DIAGRAM	393-517-01	RATING LABEL	SSTD/AUTO.FMT

FASCO DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

C N693


MODEL: 808557NVB-B11

VOLTS 240 R.P.M. 900 CLASS B130 Hz. 50
 WATTS 450 TYPE CSR J/F/V S N/L J/F/V R 20/440 Ph. 1
 AMPS 3.0 DUTY SINGM J/F/V R 20/440 PROT. AUTO

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

SPECIAL REQUIREMENTS:
 1) DE TO BE WEATHER PROOFED TO BEI -176 20mm VSEAL AND SLINGER
 FITTED AT DRIVE END.
 2) LEAD END ENDSHIELD NOT POWDER COATED.

THIRD ANGLE PROJECTION

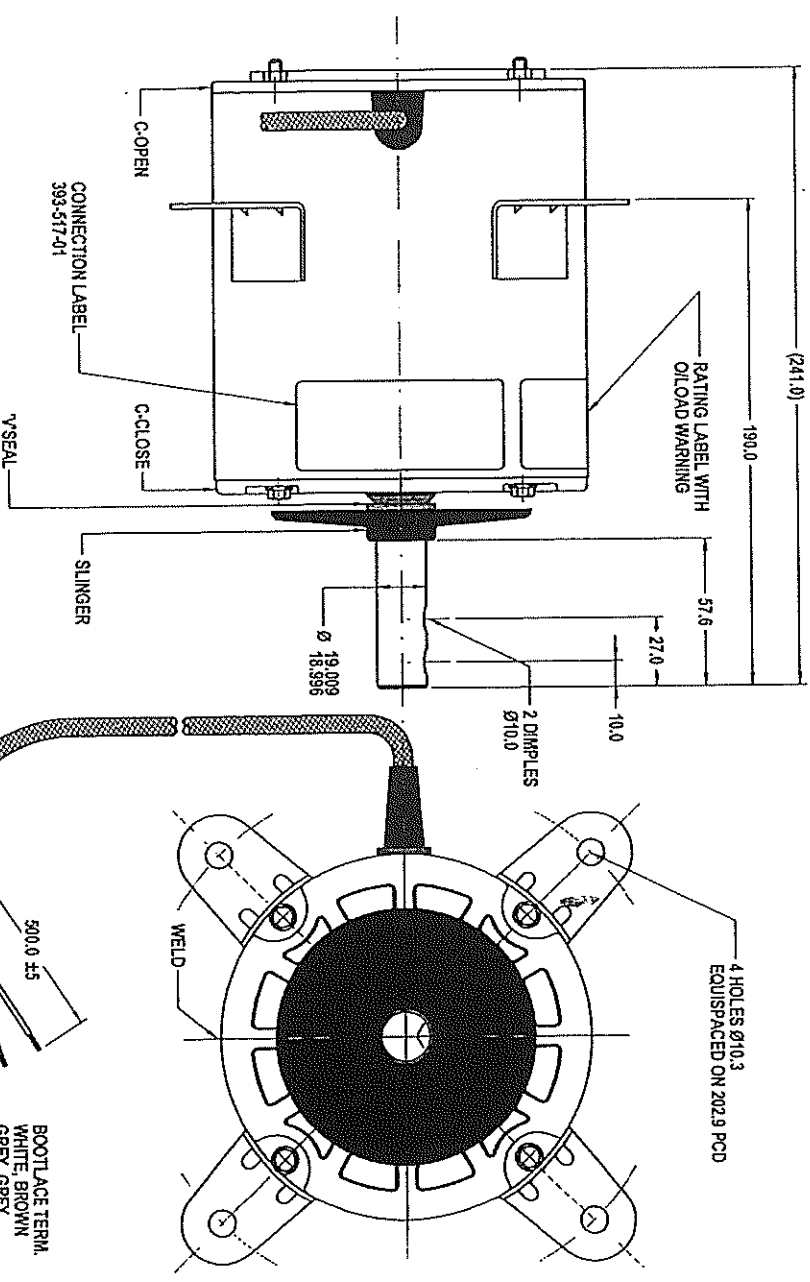

CONTROLLED COPY

1 AUG 2001

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM.	TOLERANCES	ANGULAR	± 30°
DECIMALS	± 0.10		
XX ± 0.05			
THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS			
MAT'L	FINISH	MONTRÉ	KITTI
DRAWN	CHECKED	RELEASED	SCALE
BCB SALES & SERVICE PH : 03 9546 3833 FAX : 03 9546 3356			
FRAME	STATUS	DWG. NO.	REVISION
A3	R	808557NVB-B11	B

MIC No. 004143
 By: MONTRÉ
 Date: 04/05/01
 MIC Note: MODIFIED ENDSHIELD D.E.