

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS; HOWEVER, SINCE THE MOTOR IS NOT A MAKE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.

**MOTOR SPECIFICATION**

**809456NTC-B11**

Q.R. No.	7704	CUSTOMER NO.	-
CUSTOMER	VARIOUS		
VOLTS	240	Hz	50
PHASE	1	Ph	1
SI A.C.M.	265		
MOTOR RATING	370 WATTS		
ROTATION	CLOCKWISE AT DRIVE END		
CAPACITOR	START	I/F/V	RUN
ENCLOSURE	TOTALLY ENCLOSED		
MOTOR TYPE	CSR	INSULATION CLASS	F
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN - SHAFT HORIZONTAL		
BEARING D.E.	6204 DDU	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING NDE.	6203 DDU		
SPL YLEAD	FLEX @ 1000RPM GREY WGL AND VAS SPL Y LEAD		
EARTH PROVISION	470-082-02		
BASIC BUILD SPECIFICATION	470-082-02	P/ANTI COLOUR	BLUE (RAL-5009)
PERFORMANCE SPECIFICATION	SP94117-01	RATING LABEL	STDAUTO PNT
CONNECTION DIAGRAM	305-435-09		

**FASCO** DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

C N1693

MODEL: 809456NTC-B11

VOLTS 240 R.P.M. 300 CLASS B130 H: 30


WATTS 370 TYPE CSR I/F/V'S N/A Ph 1

AMPS 265 DUTY ST/AMB I/F/NR 100/40 PROT. AUTO

**WARNING** MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

- SPECIAL REQUIREMENTS**
- 1) FIBRE WASHERS TO BE FITTED UNDER THE FROD HEADS ON DYE 66
  - 2) CAPACITOR COVER TO BE SEALED TO PROTECT FIELD WITH THREE BOND LIQUID GASKET TYPE 1104 (F/N 1B1029)

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRICAL MOTOR VARIATION SPECIFICATION (E509)

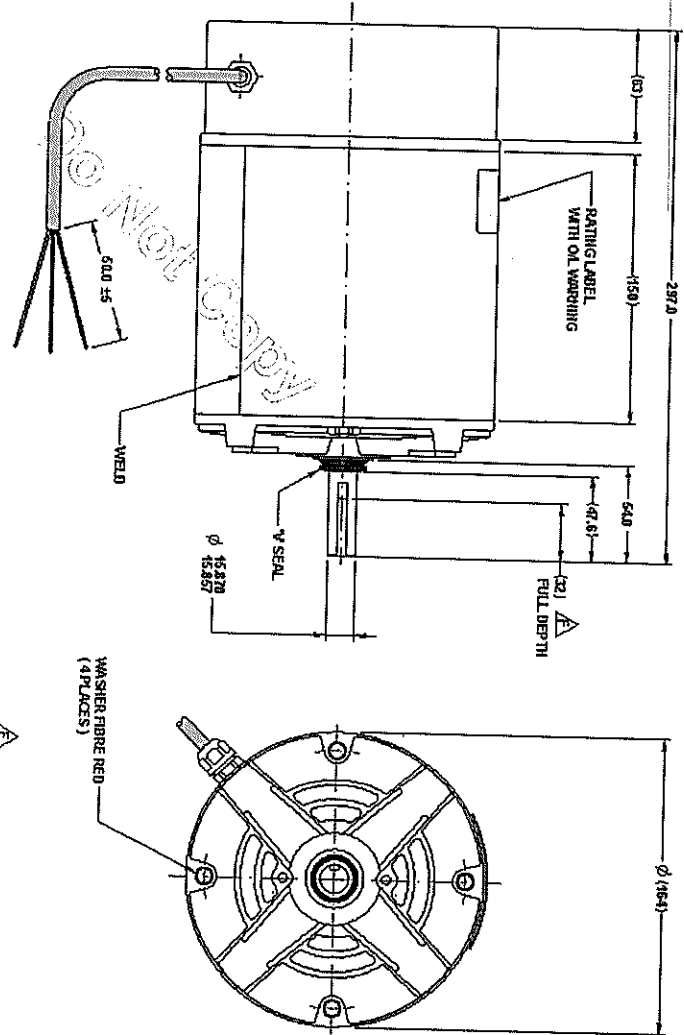

**TYPE B CHANGE. REFER MC AND NOTIFY PRODUCT DEVELOPMENT WHEN BUILDING**

**BCB SALES & SERVICE**

PH : 03 9546 3833  
FAX : 03 9546 3356

MOTOR B117-9456T-370-XAD

809456NTC-B11

**UNLESS OTHERWISE SPECIFIED: MOTOR WEIGHT**

DIMENSIONS ARE IN MM

DECIMALS ANGULAR

X ± 1.0 ± 30°

XX ± 0.1


RELEASED KANAROTE 11/06/09

SCALE 1:1

BY: THEP/ANW Date: 11/05/09

CHG DIMENSION KEY SIZE TO BE 23

SHOW DETAIL



FORM 041 REV A

This is for use by the registered system user only



THIRD ANGLE PROJECTION