

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT AWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.



MOTOR SPECIFICATION

80855BQVA-A30

Q.R. NO.	Y004423	CUSTOMER NO.	6061625
CUSTOMER	CLIMATE TECHNOLOGIES		
VOLTS	240	Hz	50
PH	1	Duty	AOM
MOTOR RATING	1370	AMPS	4.4
NOM. OUTPUT	750 WATTS		
ROTATION	CLOCKWISE DRIVE END		
CAPACITOR	START	µF/V	RUN
ENCLOSURE	VENTED		
MOTOR TYPE	CSR	INSULATION CLASS	B130
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN-EVAPORATIVE COOLER		
BEARING D.E.	6202 DDU C3	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 DDU C3		
SUPPLY LEAD	FLEX 1700 ± 30 GREY		
EARTH PROVISION	VIA SUPPLIED LEAD		
BASIC BUILD SPECIFICATION	305-570-25	PAINT/ COLOUR	PC GREY CASE PLAIN ESHIELDS
PERFORMANCE SPECIFICATION	SP85375-01	RATING LABEL	SSTDAUTO.FMT
CONNECTION DIAGRAM	393-402-06		

FASCO DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

C N693

MODEL: 6061625 80855BQVA-A30 dddmmYYYYXX

VOLTS 240 R.P.M. 1370 CLASS B130 Hz 50

WATTS 750 TYPE CSR µF/V S NIL

AMPS 4.4 DUTY AOM µF/V R 25/400 Ph 1

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

87.0 50


SPECIAL REQUIREMENTS:

1) CAPACITOR SUPPLIED BY CUSTOMER

2) STAMP CUSTOMER NO.6061625 ON THE BULX PACK ALL SIDE.

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION

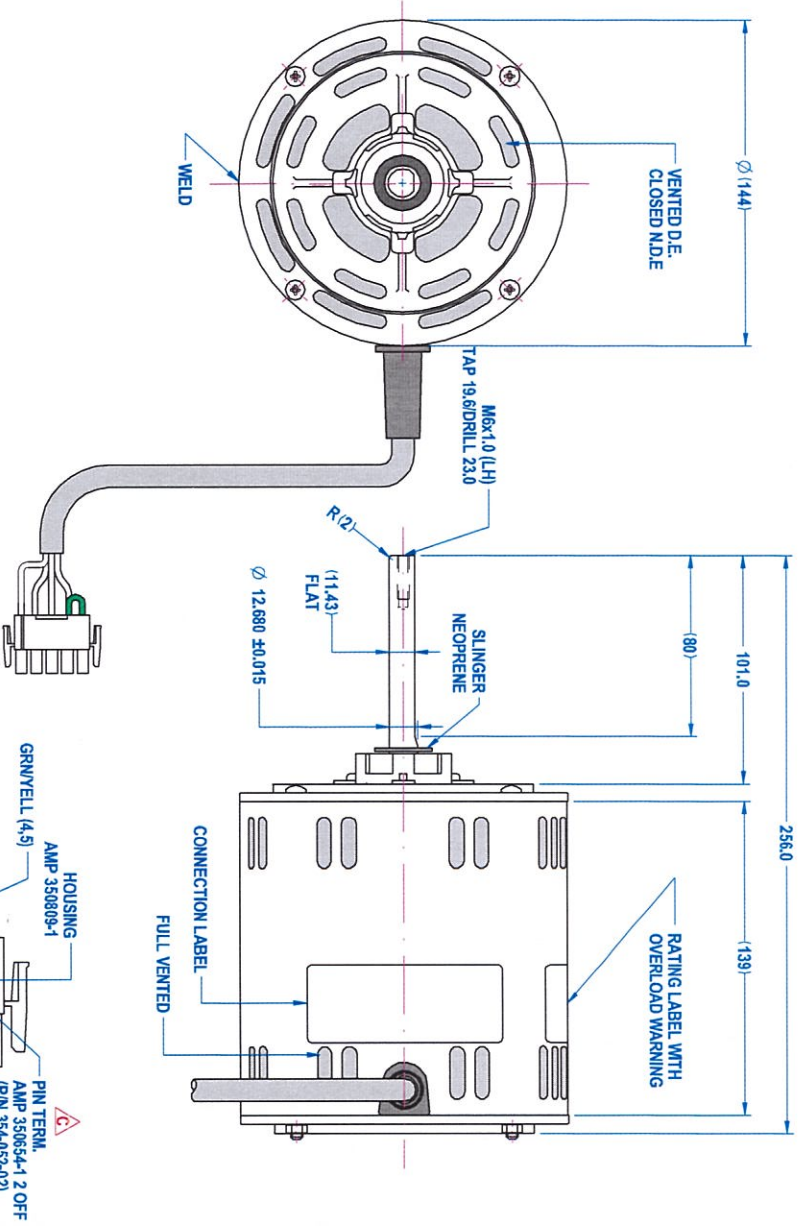

UNLESS OTHERWISE SPECIFIED: MOTOR WEIGHT X.X Kg.

DIMENSIONS ARE IN MM. TOLERANCES

DECIMALS ± 1.0

ANGULAR ± 30'

XX ± 0.1

DRAWN	Pongpun	16/05/2011	SCALE	N.T.S.
CHECKED	Pipat	27/08/2014	RELEASED	Suthipant
RELEASED	Suthipant	27/08/2014		

FASCO THAILAND

297/3 MOO 3, BANGKRAU - SAMO RD, BANGKRAU, MUANG NONTHABURI DISTRICT, NONTHABURI 11000 THAILAND

FRAME STATUS SHEET A3

MOTOR B37.5:855BV-750-XAD-CLIMA

DWG. NO. 80855BQVA-A30

REVISION C